

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 1405.1024/JDH

First Named Inventor or Application Identifier:

Masahide NODA, et al.

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: **Assistant Commissioner for Patents**
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 43]
3. ☒ Drawing(s) (35 USC 113) [Total Sheets: 7]
4. ☒ Oath or Declaration [Total Pages: 4]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☒ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application, status still proper and desired.
15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: /

18. CORRESPONDENCE ADDRESS

STAAS & HALSEY, LLP
Attn: James D. Halsey, Jr.
700 Eleventh Street, N.W., Suite 500
Washington, DC 20001

Telephone: (202) 434-1500
Facsimile: (202) 434-1501

TITLE OF THE INVENTION

COMMUNICATION PROMOTION METHOD AND SYSTEM

BACKGROUND OF THE INVENTION

Technical Field

5 The present invention pertains to a chat system in which a plurality of users connected to a network can mutually share a virtual chat space. The chat space is configured virtually on a network so that a plurality of users converse with text messages. More precisely, the present invention pertains to technology for promoting communication between users in the aforementioned chat system.

10 A chat system in the present invention is a system having a plurality of chat devices. A chat device is connected to a network and can share a virtual chat space. By operating a chat device users can send and receive text messages in a mutually interactive format.

15 IRC (Internet Relay Chat) is one type of chat system structured based on the IRC protocol (RFC1459). IRC includes IRC servers and IRC clients connected on the Internet.

20 An IRC client shares a chat space known as a channel, and can send and receive text messages in real time. An IRC server broadcasts messages from an IRC client to other IRC clients in the same channel.

Each IRC client is uniquely specified using an identifier known as a nickname. Each channel has a channel name uniquely specifying the channel. Also, each channel is correlated with a topic indicating the subject of conversation in a channel. In addition, each channel is correlated with a mode indicating the channel characteristics. The current channel is the channel in which a user participating in a plurality of channels is making a statement. A subchannel is a channel other than the current channel when a user is participating in a plurality of channels.

In the present invention a character includes both character devices having a physical substance and virtual characters that do not have a physical substance. The former character device is connected by a wire or wirelessly to a user terminal such as a PC (personal computer) or WS (work station), etc. The character device can operate according to control instructions from a user terminal. A virtual character can be displayed on a screen and operated according to a program operated at a user terminal.

Description of Related Art

In Japanese Patent Application Hei 10-241310 the present inventor proposed a communication device that combined a chat system and a character device. This invention operated a character device capable of

communicating by wire or wirelessly with a user terminal
such as a PC in accordance with keywords included in a
message. Doing so made it possible to implement
communication that was more intuitive and easier to
5 understand than communication based on text messages alone.

The aforementioned invention assumed that the character
device operated by reacting to keywords in an originated
message. Therefore, when a keyword is sent to a virtual
chat space, the character devices of all users in the space
10 perform only the same operation in response to the keyword.

However, in an actual chat system a plurality of users
is conversing under various different environments. For
example, it is possible to conceive of a situation in which
one user actively makes statements, but another user just
15 watches other people's statements. In this sort of situation
effective intuitive communication does not occur, even if
the same operation is made to happen at each user's
character device.

Also, in IRC a user can participate in a plurality of
20 chat spaces at the same time. Therefore a plurality of
control instructions may be sent from the user terminal to
the character device at almost the same time. It is also
possible to sequentially execute the issued control
instructions.

However, even if a character is continuously operated for a short time, it is not effective unless the user pays attention to the various operations. In the aforesaid invention a plurality of control instructions issued within
5 a very short time are not discarded, or a priority order is not applied in executing the control instructions, so one cannot say that it optimizes actual communication.

In addition, the aforementioned invention focused only on a character device having a physical substance as a means
10 for carrying out intuitive communication. However, one could conceive of obtaining the same effect by utilizing a virtual character that does not have physical substance, so a special hardware constitution is not necessary.

The object of the present invention is to provide
15 technology for promoting and smoothing communication that is suitable for a diverse communication environment in which a plurality of users in different environments chat simultaneously using character devices that have physical substance and virtual characters that do not have substance.

20 SUMMARY OF THE INVENTION

In order to solve the aforementioned problems, an aspect of the present invention provides a communication promotion method used in a chat system having a plurality of chat devices. The chat devices share any of virtual chat

spaces being configured on a network and can send and receive messages among themselves. The method includes:

A. Linking or installing in the aforesaid chat device a character that can be operated according to a
5 predetermined operation instruction received by the chat device,

B. Detecting a predetermined event occurring within the aforesaid chat space,

C. Based on the detected event, determining one or a
10 plurality of operation instructions for operating the character,

D. Determining one or a plurality of chat devices to be sent an operation instruction from among the chat devices sharing the chat space, and

15 E. Sending an operation instruction via the chat system to the chat device that is the operation instruction destination and operating the character.

Examples of chat systems include IRC, for example.

Character includes both character devices having a physical
20 substance and virtual characters displayed on a chat device. Event includes, for example, joining or quitting a channel, changing the mode, when the number of channel participants exceeding a predetermined number, and a statement not being made for longer than a specified time.

One or a plurality of operation instructions corresponds to a specific event. For example, let us consider the event "join a channel". Various different operation instructions are sent to a user newly joining a
5 channel and to users already joining the channel. By doing so the character of the user newly joining the channel operates so as to express "Welcome", for example. The characters of users already joining the channel are operated so as to express "Hello."

10 Another aspect of the present invention provides a communication promotion method wherein an operation instruction's originating address, an operation instruction's destination address, and an event detection time are sent to the destination together with the operation
15 instruction.

By sending information such as the origin and destination, event detection time, etc., it is possible to select an operation instruction based on this information when a plurality of operation instructions overlap and are
20 sent. In addition, one can envision a communication promotion method that selects an operation instruction to send to the destination based on some optional combination of the operation instruction's originating address, the operation instruction's destination address, and the event
25 detection time.

Another aspect of the present invention is a communication promotion system used in a chat system having a plurality of chat devices. The chat devices share any of virtual chat spaces being configured on a network and can
5 send and receive messages among themselves. The system includes a character, association table, detection means, first determination means, second determination means, and communication means.

A character is linked to or installed in the chat
10 device and can be operated in accordance with a predetermined operation instruction received by the chat device. The association table relationally stores a predetermined event occurring in the chat space, an operation instruction that operates a character, and an
15 operation instruction destination. The detection means detects a predetermined event, based on the association table. The first determination means determines one or a plurality of operation instructions in accordance with the detected event, based on the association table. The second
20 determination means determines one or a plurality of chat devices to be sent the determined operation instruction from among the chat devices sharing the chat space, based on the association table. The communication means sends the operation instruction via the chat system to the chat device

that is the operation instruction destination in order to operate the character.

This has the same operating effect as the aforementioned first aspect.

5 Another aspect of the present invention provides the communication system of the aforesaid third aspect, wherein the aforesaid communication means sends an originating address of operation instruction, a destination address of operation instruction, and an event detection time to the
10 destination together with the operation instruction.

This has the same operating effect as the aforesaid second invention.

Another aspect of the present invention provides an administration device used in a chat system having a
15 plurality of chat devices. The chat devices share any of virtual chat spaces being configured on a network and can send and receive messages among themselves. This administration device has an association table, detection means, first determination means, second determination
20 means, and communication means.

The association table relationally stores a predetermined event occurring in the chat space, and a predetermined operation instruction that operates a character linked to or installed in the chat device, and an
25 operation instruction destination. The detection means

detects a predetermined event, based on the association
table. The first determination means determines one or a
plurality of operation instructions in accordance with the
detected event, based on the association table. The second
5 determination means determines one or a plurality of chat
devices to be sent the determined operation instruction from
among the chat devices sharing the chat space, based on the
association table. The communication means sends an
operation instruction via the chat system to the chat device
10 that is the operation instruction destination in order to
operate the character.

This has the operating effect of controlling the
character as in the aforementioned first invention.

Another aspect of the present invention provides the
15 administration device of the aforementioned fifth aspect of
the present invention. The aforementioned communication
means sends an originating address of operation instruction,
a destination address of operation instruction, and an event
detection time to the destination together with the
20 operation instruction.

The administration device has the same operating effect
as the aforesaid second invention.

Another aspect of the present invention provides the
administration device of the aforementioned fifth aspect of
25 the present invention. The administration device has a

control means that selects one or a plurality of operation instructions based on predetermined conditions when a plurality of operation instructions occurs with the same chat device as the destination, and sends the operation
5 instruction(s) to the aforesaid chat device.

A predetermined condition can be the following sorts of conditions. If the interval between occurrences of the same event is within a predetermined time, all but the first event are ignored. Or a priority order may be assigned to
10 events in advance. If the interval between occurrences of events is less than a predetermined time, only the operation instruction related to the highest priority event is sent. Additionally, various conditions for selecting an operation instruction from among a plurality of operation instructions
15 can be envisioned.

Another aspect of the present invention provides the administration device of the aforementioned fifth aspect of the present invention. When a plurality of characters is linked to or installed in a chat device, the second
20 determination means can determine one or a plurality of operated characters from among the chat device's characters, based on an event. Further, the aforesaid communication means sends an operation instruction that includes a character specification to the chat device associated with
25 the character in order to operate the character.

One chat device 'A' may have a plurality of characters C1, C2... If another user triggers an event specifying chat device A's character C1, an operation instruction associated with the event and a character C1 specification are sent to
5 chat device A. As a result, only character C1 operates, and the other characters do not operate.

Another aspect of the present invention is a character linked to or installed in a chat device. The chat device is connected to a network and shares any of virtual chat spaces
10 being configured on the network and which can send and receive messages. The character has a communication means and operation means.

The communication means sends and receives operation instructions for operating the character between the
15 aforesaid chat device and the character. The operation means operates the character based on the aforesaid received operation instruction.

Characters include character devices that have a physical substance and virtual characters. An operation
20 instruction received via the communication means is executed by the operation means. Examples of operation means include a stepping motor, etc., for physical characters and a program for operating the character if it is a virtual character.

Another aspect of the present invention is an administration device used in a chat system having a plurality of chat devices. The chat devices share any of virtual chat spaces being configured on a network and can
5 send and receive messages among themselves. The administration device has an association table, detection means, determination means, and communication means.

The association table relationally stores a predetermined event occurring in the chat space, an
10 operation instruction that operates a character linked to or installed in the aforesaid chat device, and an operation instruction destination. The detection means detects a predetermined event, based on the association table. The determination means determines an operation instruction in
15 accordance with the detected event, based on the association table. The communication means sends the determined operation instruction to the chat device's character in order to operate the character.

Having a character controlled by the administration
20 device has almost the same operating effect as the aforementioned second aspect of the present invention, except for the point about the character being one linked to or installed in a user terminal operated by the administration device.

It is also possible to conceive of a case in which a plurality of characters is linked to or installed in a user terminal. In this case, when an event occurs that includes a specification for a character, the administration device
5 sends an operation instruction only to the specified character.

Another aspect of the present invention provides a computer-readable recording medium recording an administration program used in any chat device in a chat
10 system. A plurality of chat devices which share any of virtual chat spaces being configured on a network and can send and receive messages among themselves. The administration program executing the following steps A through E:

15 A. Preparing an association table that relationally stores a predetermined event occurring in the chat space, a predetermined operation instruction that operates a character linked to or installed in the aforesaid chat device, and an operation instruction destination,

20 B. Detecting a predetermined event, based on the association table,

C. Determining one or a plurality of operation instructions in accordance with the detected event, based on the association table,

D. Determining one or a plurality of chat devices to be sent the determined operation instruction from among the chat devices sharing the aforesaid chat space, based on the association table, and

5 E. Sending an operation instruction via the chat system to the chat device that is the operation instruction destination in order to operate the character.

This has the same operating effect as the administration device in the aforesaid third aspect of the
10 present invention.

Another aspect of the present invention provides a computer-readable recording medium recording an administration program used in chat devices. The chat devices share any of virtual chat spaces being configured on
15 a network and can send and receive messages among themselves. The administration program executing the following steps A through D:

A. Preparing an association table that relationally stores a predetermined event occurring in the chat space, a
20 predetermined operation instruction that operates a character linked to or installed in the aforesaid chat device, and the operation instruction destination,

B. Detecting a predetermined event, based on the association table,

C. Determining an operation instruction in accordance with the detected event, based on the association table,

D. Sending the determined operation instruction to the chat device's character in order to operate the character.

This has the same operating effect as the administration device in the aforesaid seventh aspect.

According to the present invention, a character that a user has is suitably operated for each user. The character operation frequency is controlled giving consideration to the extent needed to make a person notice the respective operation. Therefore communication can be smoothed and promoted in a plurality of chat spaces in which a plurality of users in different environments chats simultaneously.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an overall structural diagrammatical view of a communication promotion system in accordance with an embodiment of the present invention;

FIG. 2 is a functional structural diagrammatical view of an administration device of the communication promotion system in Fig. 1;

FIG. 3 is a summary table illustrating an event table of the communication promotion system in Fig. 1;

FIG. 4 is a flowchart of processing performed by the administration device of the communication promotion system in Fig. 1;

FIG. 5 is an overall structural diagrammatical view of a communication promotion system in accordance with an alternate embodiment of the present invention;

FIG. 6 is an overall structural diagrammatical view of a communication promotion system in accordance with an alternate embodiment of the present invention;

FIG. 7 is a drawing illustrating an example of operation instructions in reception sequence and execution sequence at user terminal in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Next, a communication promotion system in accordance with the present invention shall be described in detail with reference to drawings.

First Embodiment

Constitution

(1) Overall Constitution

FIG. 1 is a drawing showing the overall constitution of a communication promotion system 1 in accordance with an embodiment of the present invention. A communication promotion system in accordance with the embodiment has a character 2 and an administration device 3 added to an IRC.

The IRC has an IRC server 4, an IRC client 5, and Internet 6.

The character 2 can communicate by wire or wirelessly with a user terminal 8 operated by the IRC client 5. In 5 this embodiment the character 2 is a character 2 device that has a physical substance, but it may also be a virtual character 2. Also, a plurality of characters 2 can be provided at the user terminal 8.

The administration device 3 is provided in a bot 10 terminal 7 operated by the IRC client 5. The IRC client 5 at the bot terminal 7 is operated by a program and participates in a channel in the guise of the user.

(2) Administration Device

FIG. 2 is a structural drawing showing the functions of 15 an administration device 3. The administration device 3 has a communication module 31, a second detection module 32, a second determination module 33, and an event table 34. The communication module 31 sends and receives data between the second detection module 32, the second determination module 20 33, and the IRC client 5. The second detection module 32 detects specific events in the channel based on the event table 34. The event table 34 shall be described later.

The second determination module 33 determines an operation instruction corresponding to a specified event 25 based on the event table 34. An operation instruction is

used to indicate the operation of the character 2. The second determination module 33 also determines the IRC client 5 that is the destination for the operation instruction. The destination IRC client is selected from
5 among the IRC clients in the channel where the event occurred.

In addition, the second determination module 33 sends a control instruction corresponding to the operation instruction to the destination IRC client 5 based on the
10 event table 34. Sending a control instruction occurs via the communication module 31 and IRC. For example, the second determination module 33 uses a CTCP command and sends a control instruction to the IRC client 5. A control instruction is a command for operating a character. For
15 example, if the character 2 is a character device, the control instruction is expressed in machine language to drive the character device. Specifically, a control instruction specifies, for example, an operation or the continuation time or number of times to repeat, an
20 operation.

The second determination module 33 may also send an operation instruction instead of a control instruction to the IRC client 5. This is because it is possible to have a case in which a control instruction corresponding to an
25 operation instruction depends on the character 2. Also,

this is because a user may deliberately enter an operation instruction in order to operate the character 2. In this case, an operation instruction is converted to a control instruction at the user terminal 8.

5 In this embodiment the second determination module 33 also sends the destination, the originating communication address, destination communication address, event detection time, and serial number in addition to a control instruction or operation instruction. In the following explanation, a
10 "character instruction" can include a control instruction or operation instruction, originating communication address, destination communication address, event detection time, and serial number.

 The originating communication address is information
15 that can specify the origin of the administration device 3, i.e. describing the IP address of the administration device 3. The destination communication address is information that can specify the IRC client that is the destination for the operation instruction or control instruction. Examples
20 of this are the IP address of the user terminal operated by this IRC client, or the IRC client's nickname. Also, if everything in a channel is the destination, the channel name is described as the destination. The event detection time is the time when the administration device detects a
25 specific event, to be described later. The serial number is

a serial number added to the character instruction sent by the administration device 3.

There may also be cases in which a user terminal has a plurality of characters, and each character is operated in accordance with an event. In this case, the second determination module 33 limits the characters to be operated as follows. 1) Control instructions for each type of character are prepared in advance. Control instructions describe the type of character whose operation is desired. 2) Information specifying a character type is additionally included in the character instruction. 3) The destination communication address includes a character specification.

Here, control instructions for each type of character refers to control instructions for different characters such as "dog", "bird", etc. Also, character specification is not just the character type. It also means specifying which character at the user terminal, because there are user terminals that have a plurality of the same type of character.

FIG. 3 is a summary drawing explaining the event table 34. The event table 34 correlates and stores events, operation instructions, destinations, and control instructions. In this embodiment, when a specific event occurs, a control instruction corresponding to the event

that occurred is sent to the user terminal 8 that is the destination.

Events include the following sort of events, for example.

- 5 (1) Participate in a channel, withdraw from a channel
- (2) The number of participants in a channel exceeds a
fixed number
- (3) Change in channel mode or topic
- (4) A statement has not been made for longer than a
10 specified time
- (5) The number of participants in a chat exceeds a
fixed number
- (6) Statement of user nickname or name
- (7) Chatting is frequent
- 15 (8) Character specification

"Participate in or withdraw from channel" event (1) is an event that means a change in the users in a channel. It is preferable that operation of the character 2 be different for the user who initiated the event and other users. For
20 example, as shown in FIG. 3, the control instruction corresponding to the operation instruction "welcome" is sent to the person joining the channel. The control instruction corresponding to the operation instruction "greetings" is also sent to the other users. "Welcome" corresponds to a
25 control instruction that raises the character 2's right arm

for five seconds. The "greetings" command corresponds to a control instruction that bows the character 2's head. By observing the operation of the character 2, a user can identify whether another user joined the channel or he
5 himself joined.

"Number of participants in a channel exceeds a fixed number" event (2) is an event that promotes channel participation by causing a specific operation in the character 2 when the number of participants exceeds a
10 specific number. The control instruction to the character 2 is sent to all user terminals 8 in the channel.

It is also possible to prepare a plurality of operation instructions and control instructions corresponding to an event and make the operation of the character 2 more varied
15 as the number of participants increases. For example, if the character 2 is a famous performer, the character 2 does an operation that mimics the performance of the performer. As the number of participants increases, the character 2's performances become more varied. A user participating in a
20 channel wants to see the character 2 perform, so he urges other users to participate in the channel, resulting in the number of participants increasing.

"Change in channel mode or topic" event (3) is an event that alerts the user to a change in the mode and the like by
25 operating the character 2 when the mode or topic changes.

That's because normally it is difficult for a user to know that the mode or the like has changed. In response to an operation instruction, a control instruction that lights a lamp in the character 2 or changes the character 2's display color or the like is sent to all user terminals 8 in the channel.

"Statement has not been made for longer than a specified time" event (4) is an event for encouraging a participant's statement by operating the character 2 so that it takes a nap, for example, if no statement occurs after the passage of a specified time from the last statement. A control instruction corresponding to the operation instruction is sent to all user terminals 8 in the channel.

"Number of participants in a chat exceeds a fixed number" event (5) causes a specified operation in the character 2 at the moment when the number of people participating in a chat exceeds a fixed number. This is to encourage users in a channel to participate in a chat. Different control instructions may be sent to participants and nonparticipants in the chat. The face of the character 2 of a participant may be made to smile, the face of the character 2 of a nonparticipant may be made sad, etc.

The number of people participating in a chat may also be determined by finding the number of chat participants in

a past specified time period, based on the channel chat log normally created by the IRC client 5.

"Statement of user nickname or name" event (6) is for attracting the attention of the user who goes by the
5 nickname or name. In FIG. 3, the operation specified by the operation instruction "notice" is caused to occur at the character 2 of the user named by the nickname. In this example, a control instruction that waves the right arm three times is sent to the user's character 2. The control
10 instruction is not sent to the characters 2 of the other users.

"Chatting is frequent" event (7) is an event for encouraging more chat promotion by operating the character 2 when chatting is active. In FIG. 3 a control instruction
15 corresponding to the operation instruction "happy" for making the character 2 smile is sent to the terminals of users participating in the chat. The control instruction is not sent to the terminals of users not participating in the chat.

20 Furthermore, whether or not "chatting is frequent" can be determined by finding the number of statements or number of statement bits within a past specified time period, based on the previously described chat log, and determining whether or not it exceeds a specified number.

"Character specification" event (8) is an event that operates only a specified character 2 when a single user has a plurality of characters, for example, and a specific character 2 is specified. This event is used in combination
5 with other events. For example, a character 2 can be specified together with a nickname.

In addition, the second determination module 33 can process a plurality of overlapping events by a specified method when events overlap at the same IRC client 5 or
10 character 2. There are two processing methods: 1) sequentially execute operations for a plurality of events, and 2) selectively execute one or a plurality of operations.

In the case of the former method, the second determination module 33 converts the plurality of
15 overlapping events into control instructions in the sequence in which the events occurred and operates the character 2. However, there are instances in which the user's attention is not attracted even if the character 2 performs many operations in a short time. Therefore, if the event
20 occurrence interval is less than a specified time interval, it is preferable that the later method be used.

One example of the latter method is, when the same event occurs within a specified time period, to ignore the second and subsequent occurrences of the same event. It is

also possible to send a character instruction only in response to the first or last event within a specified time.

Another example of the latter method is to provide a priority for events in advance. In this case, a priority
5 column is provided in the event table 34. When events occur continuously in a short time only the character instruction corresponding to the highest priority event or a specific number of high priority events is selectively sent to the destination.

10 Still another example of the latter method is to give priority to events on the current channel rather than events on a subchannel. Events may also be selected based on the destination of the control instruction or operation instruction. For example, events directed at a specific
15 user take priority over events whose destination is the entire channel.

In the method of assigning priorities, it is also possible to set priorities for events at individual user terminals 8, and select a control instruction for each
20 individual user terminal 8. It is also possible to select events according to combinations of priorities set at the administration device 3 and a user's individual priorities. In addition, events can be selected through appropriate combinations of the various previously described methods.

25 (3) User Terminal

In addition to the IRC client 5, the user terminal 8 is provided with a first detection module 81, a first determination module 83, and a character communication module 82.

5 The first detection module 81 detects character instructions sent from the administration device 3 using messages sent and received by the IRC client 5.

10 The first determination module 83 extracts control instructions from character instructions and passes them to the character communication module 82. If an operation instruction is described in the character instruction, the first determination module 83 converts the operation instruction to a control instruction and passes it to the character communication module 82. The first determination
15 module 83 should be provided with a table correlating control instructions and operation instructions.

20 The character communication module 82 sends and receives data between the character 2 and the first detection module 81 if the character 2 has a physical substance. In this case, a communication library utilizing driver software normally installed in a PC is utilized in the character communication module 82. If the character 2 is a virtual character, the character communication module 82 passes control instructions to the character 2. In this
25 case, an ordinary inter-module communication method is used.

(4) Character

The character 2 has a terminal communication module 21 and an operation module 22. If the character 2 has a physical substance, the terminal communication module 21 has an IC containing a program for receiving control instructions via a serial cable or the like from the user terminal 8. If the character 2 is a virtual character, the terminal communication module 21 receives control instructions from the character communication module 82.

If the character 2 has a physical substance, the operation module 22 operates the character 2 mechanically based on the control instruction. According to the operation, the operation module 22 can also create a sound or turn a lamp installed in the character 2 on and off. If the character 2 is a virtual character, the operation module 22 is a program that displays the character 2 on the user's screen and operates it.

In addition, if the character 2 has a physical substance, it can be used as an input means for the character 2. For example, when user A joins a channel, a user can make a statement rejecting user A's participation by performing the operation "kick" at the character 2.

It is also possible to provide the right to make a statement by doing a specific operation such as hitting the character 2 on the head, for example. It is preferable that

a user be able to easily know his own character status—when the user has the right to make a statement and when he does not—by changing the character color, for example. In addition, it is preferable that a request for the right to
5 make a statement be sent only when a character that does not have the right to make a statement performs a specific operation.

Processing Flow

FIG. 4 is a flow chart showing the flow of processing
10 performed by the administration device 3.

This example explains processing that uses a method such that when the same event occurs within a specified time period, an event is selected by ignoring all events other than the first. The administration device 3 starts the
15 following processing by starting an ICR client 5 in the bot terminal.

In Step S1, the administration device 3 waits for the occurrence of a specified event. When it decides the event has occurred, the flow shifts to Step S2. If it decides the
20 event has not occurred, it returns again to Step S1 and waits for the next event.

In Step S2 the administration device 3 decides whether or not the same event has occurred within a predetermined specific time period. If it decides "Yes", it returns to
25 Step S1. If it decides "No", the flow shifts to Step S3.

In Step S3 the administration device 3 decides the operation instruction corresponding to the event that occurred, based on the event table 34. Next, based on the operation instruction, it decides the destination of the control instruction. For example, if user A joins a channel, the control instruction corresponding to the "welcome" command is sent to user A's terminal and the control instruction corresponding to the command "greetings" is sent to other terminals. Each terminal's IP address can be obtained from the IRC client 5. The administration device 3 sends a character instruction to the decided-upon destination using a CTCP command, for example. A character instruction includes a control instruction, administration device 3's IP address, destination user terminal IP address, event detection time, and serial number.

In Step S4 the administration device 3 decides whether or not the IRC client 5 has finished. If it decides "No", it returns to step S1 again to wait for the next event. If it decides "Yes", the processing ends.

20 Second Embodiment

Constitution

FIG. 5 shows the overall structure of a communication promotion system in accordance with a second embodiment of the present invention. The communication promotion system in this embodiment has the same structure as the first

embodiment, except that the administration device 3 is provided in the server terminal where the IRC server 4 operates, and the bot terminal 7 is not provided.

Processing Flow

5 The communication promotion system in this embodiment performs the same processing as the aforesaid first embodiment. However, processing starts when the IRC server 4 starts.

10 In this embodiment, information that cannot be detected by the administration device 3 in the bot terminal 7 in the aforesaid first embodiment can be used as an event.

Third Embodiment

Constitution

15 FIG. 6 shows the overall structure of a communication promotion system in accordance with a third embodiment of the present invention. The structure of the character 2 in this embodiment is the same as in the aforesaid first or second embodiment. However, this embodiment differs from the aforesaid embodiments in that the administration device 3 is provided in each user terminal 8. The administration device 3 basically controls only the character 2 linked to or installed in each user terminal 8. The administration device 3 in this example can also control the character 2 in another user terminal 8. However, if characters 2 in a plurality of terminals are controlled by the administration

20

25

device 3, it is preferable that the constitution of the aforesaid first or second embodiment be used. That's because the system structure is simpler.

In addition to the ICR client 5, the user terminal 8 has the administration device 3 and the character communication module 82. The character communication module 82 sends and receives data between the administration device 3 and the character 2.

Processing Flow

10 The administration device 3 in this embodiment performs the same processing as the administration device 3 in the first embodiment. However, when deciding a control instruction's destination there are instances in which the user terminal 8 has a plurality of characters 2, and an
15 event occurs that specifies one or more of the character 2. Also, the administration device 3 sends the control instruction to the character communication module 82, not the IRC client 5.

Fourth Embodiment

20 Constitution

The communication promotion system in accordance with this embodiment has the same structure as the first or second embodiment. However, the function of the first determination module 83 provided in the user terminal is
25 different. Specifically, in this embodiment the first

determination module 83 rearranges and selects control instructions based on the received character instruction. Below, the function of the first determination module 83 shall be explained while giving a specific example.

5 For example, sometimes character instructions do not arrive in the sequence in which the administration device sent them because of network traffic and other such conditions. FIG. 7 shows the operation instructions arranged in the sequence in which the first determination
10 module 83 received the character instructions, and the operation instructions rearranged in execution sequence by the first determination module 83. Character instructions showing this sort of series of character operations may be received out of order. In this case the first determination
15 module 83 rearranges the operation instructions in the event detection time sequence and serial number sequence and sends the control instructions to the character in that order.

The first determination module 83 may also select character instructions based on the origin or destination.

20 For example, regardless of the selection of events converted into character instructions by the administration device 3, if a plurality of character instructions is received within a specified time period, character instructions from a specified user take priority over character instructions
25 from the administration device 3. Also, for example,

character instructions to oneself take priority over character instructions whose destination is everyone in the channel.

In addition, the first determination module 83 can
5 decide the destination based on the control instruction in the character instruction. For example, if control instructions are different for each character type, the first determination module 83 sends extracted control instructions just to the operable characters, based on the
10 control instructions in the character instruction. In this case the first determination module 83 needs to store control instructions for each character.

Since operation instructions may be described in a character instruction, it is preferable that the first
15 determination module 83 have a table correlating operation instructions and control instructions. If control instructions are different for each type of character, this table is prepared in advance for each type of character. By doing so, the first determination module 83 can convert
20 operation instructions in a character instruction to control instructions corresponding to each character.

For example, suppose a user terminal has a character device "dog" and a virtual character "bird". If the operation instruction "happy" is received, the first
25 determination module 83 sends "dog" a control instruction to

wag its tail. And it sends "bird" a control instruction to flap its wings.

While only selected embodiments have been chosen to illustrate the present invention, to those skilled in the art it will be apparent from this disclosure that various changes and modifications can be made herein without departing from the scope of the invention as defined in the appended claims. Furthermore, the foregoing description of the embodiments according to the present invention is provided for illustration only, and not for the purpose of limiting the invention as defined by the appended claims and their equivalents.

What is claimed is:

1. A communication promotion method used in a chat system having a plurality of chat devices which share any of virtual chat spaces being configured on a network and which
5 can send and receive messages among themselves, comprising:
linking or installing in the chat device a character that can be operated according to a predetermined operation instruction received by the chat device,
detecting a predetermined event occurring within the
10 chat space,
determining one or a plurality of operation instructions for operating the character, based on the detected event,
determining one or a plurality of chat devices to be
15 sent an operation instruction from among the chat devices sharing the chat space, and
sending an operation instruction via the chat system to the chat device that is the operation instruction destination and operating the character.
- 20 2. The communication promotion method set forth in claim 1, wherein an operation instruction's originating address, an operation instruction's destination address, and an event detection time are sent to the destination together with the operation instruction.

3. A communication promotion system used in a chat system having a plurality of chat devices which share any of virtual chat spaces being configured on a network and which can send and receive messages among themselves, comprising:

5 a character that is linked to or installed in the chat device and can be operated according to a predetermined operation instruction received by the chat device,

an association table that relationally stores a predetermined event occurring in the chat space, an

10 operation instruction that operates a character, and an operation instruction destination,

detection means for detecting a predetermined event, based on the association table,

15 first determination means for determining one or a plurality of operation instructions in accordance with the detected event, based on the association table,

second determination means for determining one or a plurality of chat devices to be sent the determined operation instruction from among the chat devices sharing
20 the chat space, based on the association table, and

communication means for sending the operation instruction via the chat system to the chat device that is the operation instruction destination in order to operate the character.

4. The communication system set forth in claim 3,
wherein said communication means sends an originating
address of operation instruction, a destination address of
operation instruction, and an event detection time to the
5 destination together with the operation instruction.

5. An administration device used in a chat system
having a plurality of chat devices which share any of
virtual chat spaces being configured on a network and which
can send and receive messages among themselves, comprising:
10 an association table that relationally stores a
predetermined event occurring in the chat space, a
predetermined operation instruction that operates a
character linked to or installed in the chat device, and the
operation instruction destination,

15 detection means for detecting a predetermined event,
based on the association table,

first determination means for determining one or a
plurality of operation instructions in accordance with the
detected event, based on the association table,

20 second determination means for determining one or a
plurality of chat devices to be sent the determined
operation instruction from among the chat devices sharing
the chat space, based on the association table, and

communication means for sending an operation
25 instruction via the chat system to the chat device that is

the operation instruction destination in order to operate the character.

6. The administration device set forth in claim 5, wherein said communication means sends an originating
5 address of operation instruction, a destination address of operation instruction, and an event detection time to the destination together with the operation instruction.

7. The administration device set forth in claim 5, additionally comprising a control means that selects one or
10 a plurality of operation instructions based on predetermined conditions when a plurality of operation instructions occurs with the same chat device as the destination, and sends the operation instruction(s) to the chat device.

8. The administration device set forth in claim 5,
15 wherein when a plurality of characters is linked to or installed in a chat device, said second determination means can determine one or a plurality of characters to operate from among the chat device's characters, based on an event, and

20 said communication means sends an operation instruction that includes a character specification to the chat device associated with the character in order to operate the character.

9. A character linked to or installed in a chat
25 device which is connected to a network and which shares any

of virtual chat spaces being configured on said network and which can send and receive messages, comprising:

communication means for sending and receiving operation instructions for operating the character between the chat
5 device and the character, and

operation means for operating the character based on said received operation instruction.

10. An administration device used in a chat system having a plurality of chat devices which share any of
10 virtual chat spaces being configured on a network and which can send and receive messages among themselves, comprising:
an association table that relationally stores a predetermined event occurring in the chat space, an
operation instruction that operates a character linked to or
15 installed in the chat device, and an operation instruction destination,

detection means for detecting a predetermined event, based on the association table,

determination means for determining an operation
20 instruction in accordance with the detected event, based on the association table, and

communication means for sending the determined operation instruction to the chat device's character in order to operate the character.

11. A computer-readable recording medium recording an administration program used in any chat device in a chat system in which a plurality of chat devices which share any of virtual chat spaces operating on a network can send and
5 receive messages among themselves; the administration program executing the steps of:

A. Preparing an association table that relationally stores a predetermined event occurring in the chat space, a predetermined operation instruction that operates a
10 character linked to or installed in said chat device, and an operation instruction destination,

B. Detecting predetermined event, based on the association table,

C. Determining one or a plurality of operation
15 instructions in accordance with the detected event, based on the association table,

D. Determining one or a plurality of chat devices to be sent the determined operation instruction from among the chat devices sharing said chat space, based on the
20 association table, and

E. Sending an operation instruction via the chat system to the chat device that is the operation instruction destination in order to operate the character.

12. A computer-readable recording medium recording an
25 administration program used in chat devices which share any

of virtual chat spaces being configured on a network and can send and receive messages among themselves; the administration program executing the stages of:

A. Preparing an association table that relationally
5 stores a predetermined event occurring in the chat space, a predetermined operation instruction that operates a character linked to or installed in the chat device, and an operation instruction destination,

B. Detecting a predetermined event, based on the
10 association table,

C. Determining an operation instruction in accordance with the detected event, based on the association table, and

D. Sending the determined operation instruction to
the chat device's character in order to operate the
15 character.

ABSTRACT

A communication promotion method is provided to appropriately support communication by a plurality of users in different environments. A character 2, operable by an IRC client 5, is linked to or installed in a user terminal 8. An administration device 3 detects a specific event in a channel and sends a specific command to the IRC client 5 via IRC. Commands do not always have to be sent to all of the IRC client 5, and may be different according to the IRC client 5. The user terminal 8 detects the aforesaid command and sends it to the character 2. Characters at each user terminal 8 operate as specified by the command.

Fig. 1

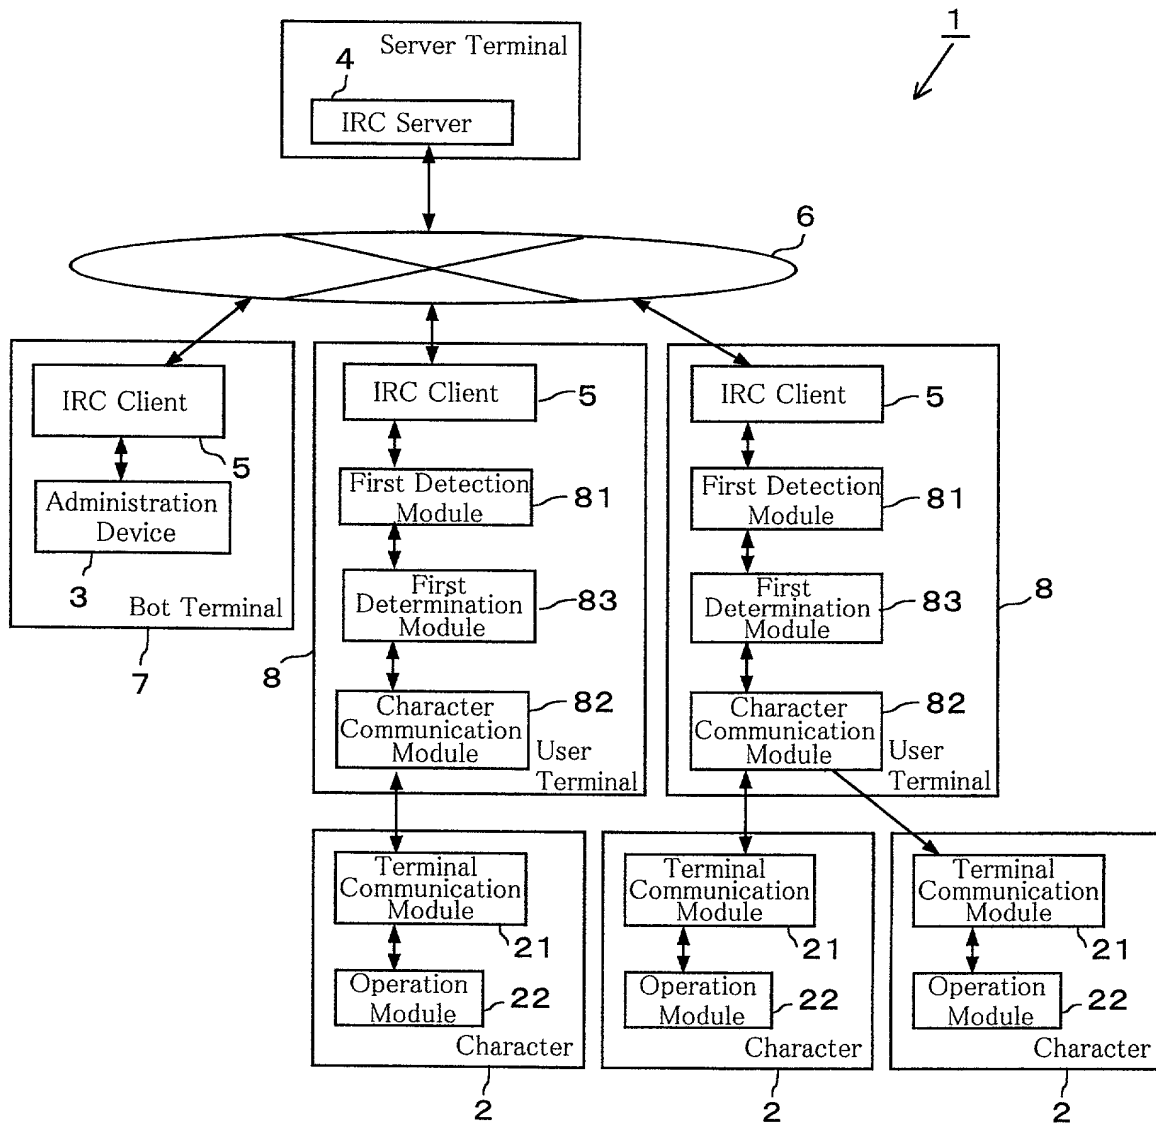


Fig. 2

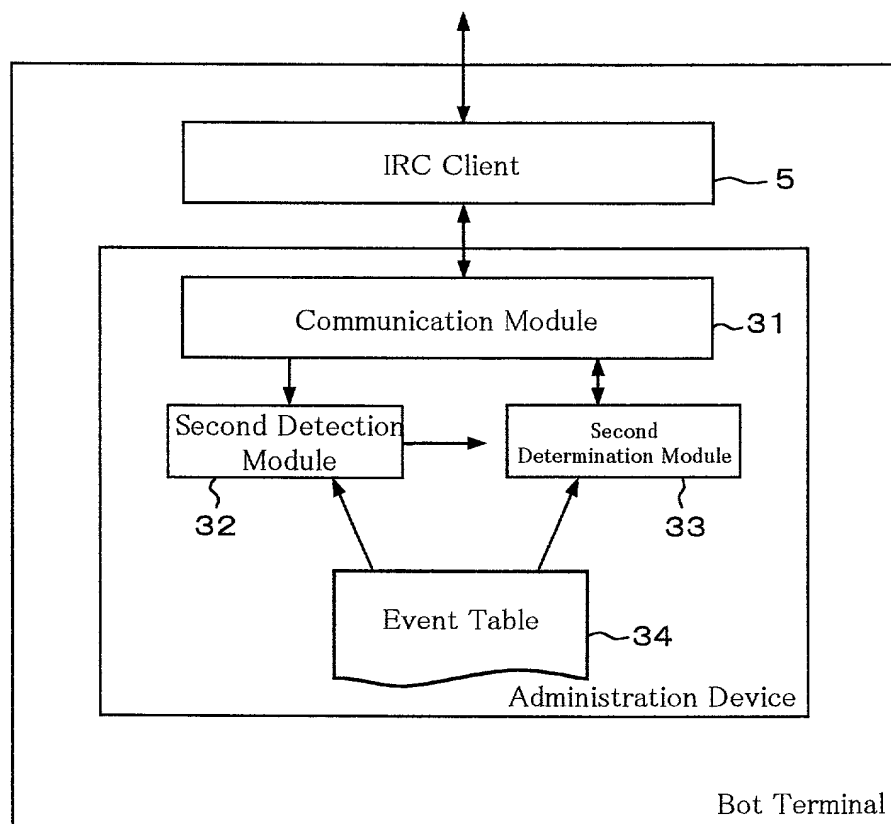


Fig. 3

Event	Operation Instruction	Destination	Control Instruction
Statement containing participant name	"Notify"	User specified by name	ARM(LEFT) WAVE 3
Participate in channel	"Welcome"	New participant	ARM(RIGHT) UP 5
	"Greetings"	Existing participant	HEAD DOWN
Chatting is frequent	"Happy"	User participating in chat	FACE SMILE
⋮	⋮	⋮	⋮
⋮	⋮	⋮	⋮

Fig. 4

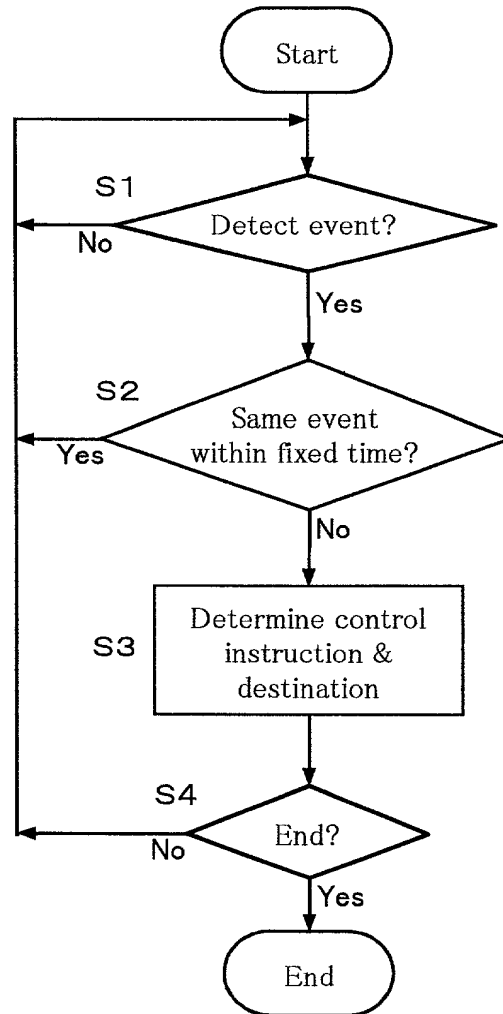


Fig. 5

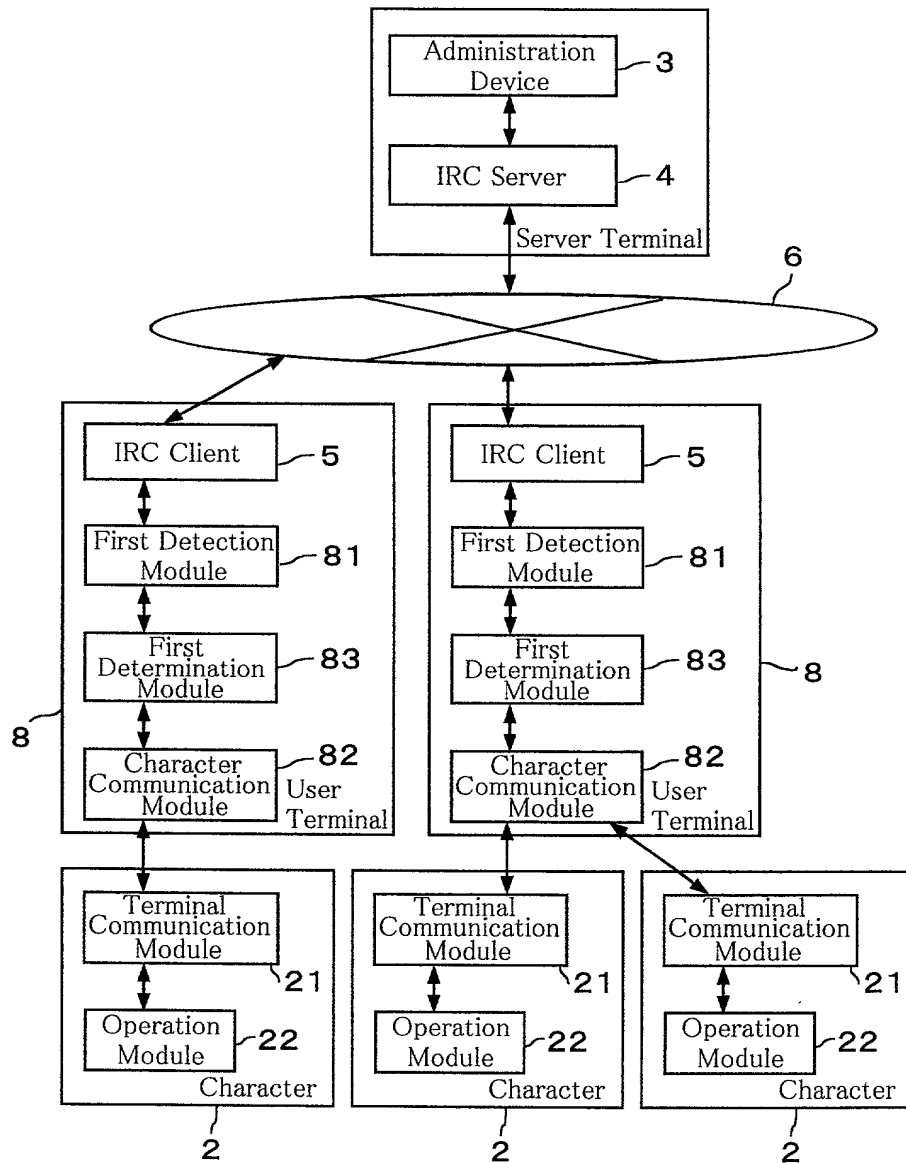


Fig. 6

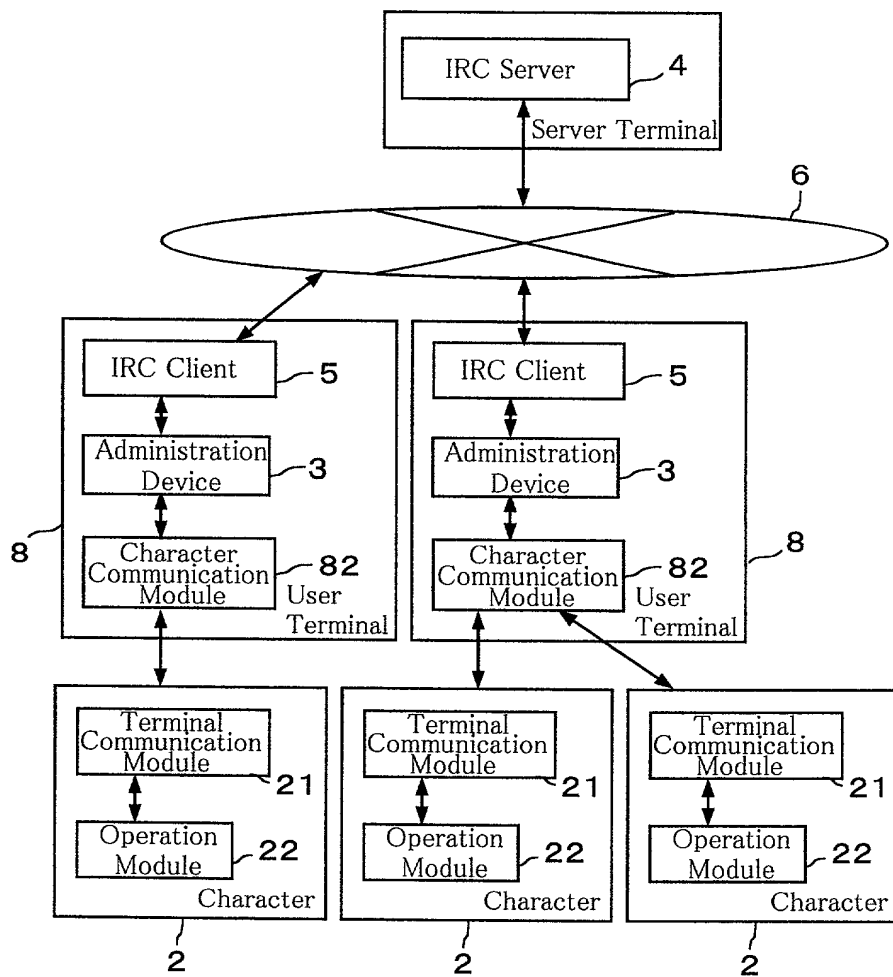


Fig. 7

Received Operation Instructions

Origin	Destination	Event Detection Time	Operation Instruction	Serial Number
Administration device	All on channel	15:00:02	Make face blush	3
Administration device	All on channel	15:00:01	Say "Why are you raising your hand?"	2
Administration device	All on channel	15:00:00	Raise hand	1
Administration device	All on channel	15:00:03	Say "I'm embarrassed"	4

Operation Instructions in Execution Sequence

Origin	Destination	Event Detection Time	Operation Instruction	Serial Number
Administration device	All on channel	15:00:00	Raise hand	1
Administration device	All on channel	15:00:01	Say "Why are you raising your hand?"	2
Administration device	All on channel	15:00:02	Make face blush	3
Administration device	All on channel	15:00:03	Say "I'm embarrassed"	4

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

COMMUNICATION PROMOTION METHOD AND

SYSTEM

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
(該当する場合) _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

11-292808	Japan
(Number)	(Country)
(番号)	(国名)
(Number)	(Country)
(番号)	(国名)

私に、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)	(Filing Date)
(出願番号)	(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)	(Filing Date)
(出願番号)	(出願日)
(Application No.)	(Filing Date)
(出願番号)	(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

14/10/99
(Day/Month/Year Filed)
(出願年月日)
(Day/Month/Year Filed)
(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)	(Filing Date)
(出願番号)	(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)
(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration
(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358; William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938; Michael C. Soldner, 41,455; Norman L. Ourada, 41,235; Kevin R. Spivak, P-43,148; and William M. Schertler, 35,348 (agent)

書類送付先

Send Correspondence to:

STAAS & HALSEY
700 Eleventh Street, N.W.
Suite 500
Washington, D.C. 20001

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY
(202) 434-1500

唯一または第一発明者名	Full name of sole or first inventor	
	Masahide NODA	
発明者の署名	日付	Inventor's signature Date
		Masahide Noda July 25, 2000
住所	Residence	
1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588, Japan	c/o FUJITSU LIMITED	
国籍	Citizenship	
	Japan	
私書箱	Post Office Address	
	same as above	
第二共同発明者	Full name of second joint inventor, if any	
	Kazuki MATSUI	
第二共同発明者	日付	Second inventor's signature Date
		Kazuki Matsui July 25, 2000
住所	Residence	
1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588, Japan	c/o FUJITSU LIMITED	
国籍	Citizenship	
	Japan	
私書箱	Post Office Address	
	same as above	

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)

Japanese Language Declaration

	Full name of third joint inventor, if any Yasuhide MATSUMOTO
日付	Third Inventor's signature <i>Yasuhide Matsumoto</i> Date July 25, 2000
住所 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588, Japan	Residence C/O FUJITSU LIMITED
国籍	Citizenship Japan
郵便の宛先	Post Office Address same as above

	Full name of fourth joint inventor, if any Masahiko MURAKAMI
日付	Fourth Inventor's signature <i>Masahiko Murakami</i> Date July 25, 2000
住所 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588, Japan	Residence C/O FUJITSU LIMITED
国籍	Citizenship Japan
郵便の宛先	Post Office Address same as above

	Full name of fifth joint inventor, if any Tatsuro MATSUMOTO
日付	Fifth Inventor's signature <i>Tatsuro Matsumoto</i> Date July 25, 2000
住所 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588, Japan	Residence C/O FUJITSU LIMITED
国籍	Citizenship Japan
郵便の宛先	Post Office Address same as above

	Full name of sixth joint inventor, if any Masahiro MATSUDA
日付	Sixth Inventor's signature <i>Masahiro Matsuda</i> Date July 25, 2000
住所 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588, Japan	Residence C/O FUJITSU LIMITED
国籍	Citizenship Japan
郵便の宛先	Post Office Address same as above

(第六またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)